



KELVIN (CCT):

- 3000K** 830
- 3500K** 835
- 4100K** 841
- 5000K** 850

PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

FCF26DTT8**/4P

26W 4 PIN Double Twin Compact Fluorescent Lamp

Fusion CFL lamps are available in PL, TT, DTT, TTT as well as T2 spiral, R, BR, G25 and PAR configurations. These lamps provide the efficiency of fluorescent technology in many different applications including recessed, surface mounted and specialty fixtures. The long life of these lamps far outlast all incandescent equivalents, saving you money on replacement labor and maintenance costs. Save up to 75% in energy costs compared to the equivalent lumen output incandescent lamps.

FEATURES & BENEFITS:

- Long Life - Save on re-lamping and replacement costs
- High CRI - Excellent colour rendering for improved visual impact
- Wide Range of Colour Temperatures - Light your space to suit your ambience
- Instant Start - No warm-up time, and flicker-free operation

AVAILABLE TYPES:

- 13 Watt: FCF13DTT8**/4P 830/835/841
- 18 Watt: FCF18DTT8**/4P 830/835/841
- 26 Watt: FCF26DTT8**/4P 830/835/841/850

APPLICATIONS:

- Commercial: Offices & Hospitals - Ambient Lighting, Task Lighting, etc.
- Retail: Malls, Shopping Centers, Stores, etc.
- Hospitality: Restaurants, Hotels, etc.
- Recreational: Sports Facilities, Gymnasiums, etc.
- Industrial: Warehousing, Manufacturing Facilities, etc.

APPROVALS

RoHS
COMPLIANT

ANSI
CODE | **S78**







ORDERING INFORMATION:

PART NUMBER	IMS CODE	DESCRIPTION	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FCF26DTT830/4P	0246-7953	26W 4P Double Twin Tube CFL Lamp	50	390 x 220 x 210 mm - 15.35 x 8.66 x 8.27 in	4.0kg - 8.8lbs
FCF26DTT835/4P	0246-7956	26W 4P Double Twin Tube CFL Lamp	50	390 x 220 x 210 mm - 15.35 x 8.66 x 8.27 in	4.0kg - 8.8lbs
FCF26DTT841/4P	0246-7959	26W 4P Double Twin Tube CFL Lamp	50	390 x 220 x 210 mm - 15.35 x 8.66 x 8.27 in	4.0kg - 8.8lbs
FCF26DTT850/4P	0268-1151	26W 4P Double Twin Tube CFL Lamp	50	390 x 220 x 210 mm - 15.35 x 8.66 x 8.27 in	4.0kg - 8.8lbs

OPERATING SPECIFICATIONS:

PART NUMBER	LAMP WATTS	NOMINAL VOLTAGE	INITIAL LUMENS	MEAN LUMENS	EFFICACY	RATED LIFE (HOURS)	CCT	CRI	WARRANTY
FCF26DTT830/4P	26W	105 ± -10V	1800 lm	1620 lm	69 lm/W	10,000 hrs	3000K	82+ Ra	1 Year
FCF26DTT835/4P	26W	105 ± -10V	1800 lm	1620 lm	69 lm/W	10,000 hrs	3500K	82+ Ra	1 Year
FCF26DTT841/4P	26W	105 ± -10V	1800 lm	1620 lm	69 lm/W	10,000 hrs	4100K	82+ Ra	1 Year
FCF26DTT850/4P	26W	105 ± -10V	1800 lm	1620 lm	69 lm/W	10,000 hrs	4100K	82+ Ra	1 Year

OPERATING SPECIFICATIONS:

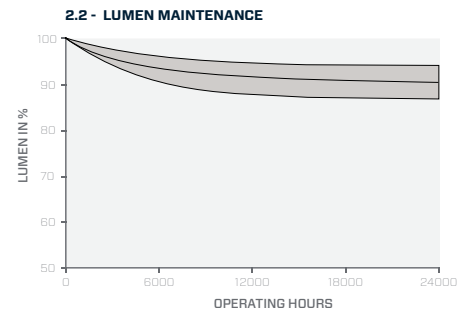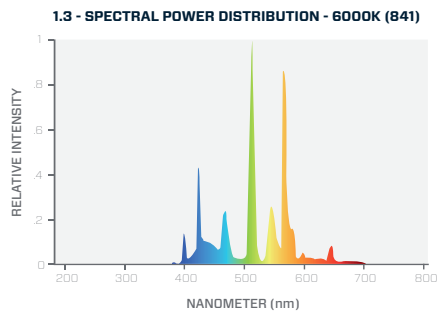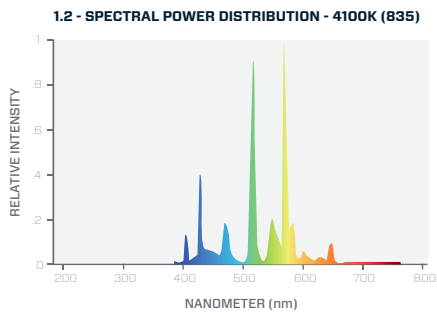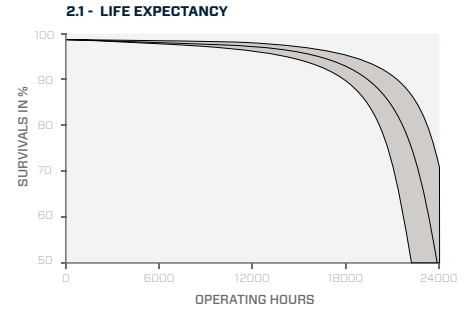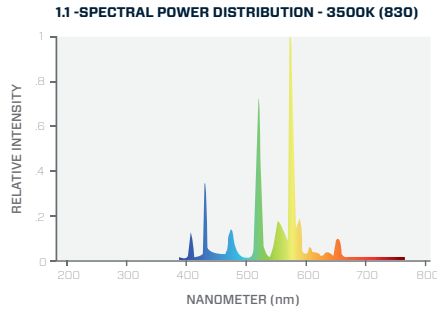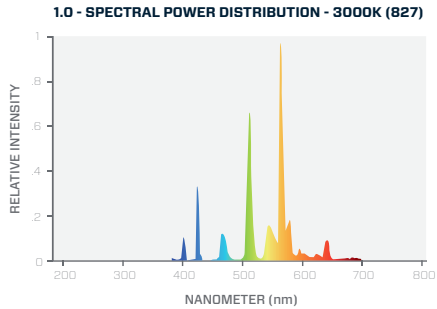

ELECTRICAL SPECIFICATIONS:

PART NUMBER	STARTING TYPE	NOMINAL LAMP OPERATING VOLTAGE	NOMINAL LAMP OPERATING CURRENT	OPERATING FREQUENCY	HOT CATHODE RESISTANCE	BALLAST TYPE
FCF26DTT8**/4P	Instant	105 ± 10V	0.33 A	60Hz	13 ± 3.3Ω	Rapid Start

* NOTE: Physical specifications are the same for all colour temperatures

PHYSICAL SPECIFICATIONS:

PART NUMBER	LAMP STYLE	BASE	SOCKET	PHOSPHOR
FCF26DTT8**/4P	PL	Ceramic	G24-q1	Tri-Phosphor

A	B	C	D	DIA (Ø)
26.5 mm - 1.04"	12.0 mm - 0.47"	148.0 mm - 5.83"	170.0 mm - 6.69"	12.0mm - 0.47"

* NOTE: Physical specifications are the same for all colour temperatures

