



KELVIN (CCT):

**3000K** 930

PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

# FLED10PAR30LN930W

## 10W PAR30 LN LED DIM 930 W/L

Fusion FLED PAR30L lamps are designed to perform and provide accented and focused light. Fusion's exceptional lens design is made to provide excellent light output, outstanding life and considerable energy savings.

**FEATURES & BENEFITS:**

- Long Life Equates to Lower Maintenance Costs
- Targeted and Controlled Light For Better Design
- Dimmable to 5% for design flexibility
- Contains no mercury or lead
- Wet location rated

**AVAILABLE TYPES:**

- 10 Watt: FLED10PAR30LN930W 930

**APPLICATIONS:**

- Offices – ambient lighting, task lighting, etc
- Retail Stores – ambient lighting, showcase lighting, etc
- Restaurants – Accent lighting, ambient lighting, atmosphere creations, etc.
- Hotels – Accent lighting, ambient lighting, etc
- Recreational Facilities – Accent lighting, ambient lighting, etc

**APPROVALS**



**ORDERING INFORMATION:**

PART NUMBER	IMS CODE	DESCRIPTION	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FLED10PAR30LN930W	0316-5567	10W PAR30 LN LED DIM 930 W/L	6	30.7 x 20.5 x 13 cm - 12 x 8 x 5.1 in	1.73 kg - 3.81 lbs

**OPERATING SPECIFICATIONS:**

PART NUMBER	LAMP WATTS	EQUIVALENT WATTAGE	INITIAL LUMENS	EFFICACY	RATED LIFE (HOURS)	CCT	CRI	DIMMABLE	WARRANTY
FLED10PAR30LN930W	10W	75W	800 lm	80 lm/W	40,000 hrs	3000K	90+	YES	5



PART NUMBER:

# FLED10PAR30LN930W


10W PAR30 LN LED DIM 930 W/L

**ELECTRICAL SPECIFICATIONS:**

PART NUMBER	LAMP WATTS	LAMP OPERATING VOLTAGE	LAMP OPERATING CURRENT	OPERATING FREQUENCY	POWER FACTOR	DRIVER
FLED10PAR30LN930W	10	120V	95mA	60Hz	0.7	Internal

**PHYSICAL SPECIFICATIONS:**

PART NUMBER	LAMP STYLE	BASE	BULB FINISH
FLED10PAR30LN930W	PAR30LN	E26	LED

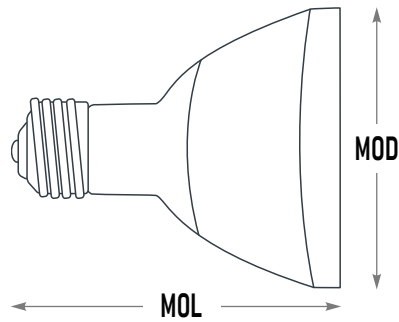

MAX LENGTH (MQL)	MAX OVERALL DIA (MOD)	WEIGHT oz/lbs	OPERATING TEMP.	STORAGE TEMP.	LED TYPE	BEAM ANGLE	NUMBER OF LEDS
120 mm - 4.72"	95 mm - 3.74"	6.5 oz - 0.407 lbs	-20° - 45° F	-40° - 85° F	SMD	40°	12



LED DIM PAR30 LN