



PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

FLED11PAR30SN9**

11W PAR30 SN LED DIM

Fusion's FLED PAR30 lamps are designed to perform and provide accented and focused light. Fusion's advanced lens design is built to provide exceptional lumen output, extended life and an increase in energy savings.

FEATURES & BENEFITS:

- Long Life Equates to Lower Maintenance Costs
- Targeted and Controlled Light For Better Design
- Dimmable to 5% for design flexibility
- Contains no mercury or lead
- Damp location rated


AVAILABLE TYPES:

- 11 Watt: FLED11PAR30SN930 930
- 11 Watt: FLED11PAR30SN950 950

APPLICATIONS:

- Offices – ambient lighting, task lighting, etc
- Retail Stores – ambient lighting, showcase lighting, etc
- Restaurants – Accent lighting, ambient lighting, atmosphere creations, etc.
- Hotels – Accent lighting, ambient lighting, etc
- Recreational Facilities – Accent lighting, ambient lighting, etc

APPROVALS



KELVIN (CCT):

- 3000K** 930
- 5000K** 950

ORDERING INFORMATION:

PART NUMBER	IMS CODE	DESCRIPTION	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FLED11PAR30SN930	0316-5561	11W PAR30 SN LED DIM 930	6	30.7 x 20.5 x 9.7 cm - 12 x 8 x 3.8 in	1.58 kg - 3.48 lbs
FLED11PAR30SN950	0316-5564	11W PAR30 SN LED DIM 950	6	30.7 x 20.5 x 9.7 cm - 12 x 8 x 3.8 in	1.58 kg - 3.48 lbs

OPERATING SPECIFICATIONS:


PART NUMBER	LAMP WATTS	EQUIVALENT WATTAGE	INITIAL LUMENS	EFFICACY	RATED LIFE (HOURS)	CCT	CRI	DIMMABLE	WARRANTY
FLED11PAR30SN930	11W	75W	800 lm	72.7 lm/W	25,000 hrs	3000K	90+	YES	5
FLED11PAR30SN950	11W	75W	800 lm	72.7 lm/W	25,000 hrs	5000K	90+	YES	5

ELECTRICAL SPECIFICATIONS:

PART NUMBER	LAMP WATTS	LAMP OPERATING VOLTAGE	LAMP OPERATING CURRENT	OPERATING FREQUENCY	POWER FACTOR	DRIVER
FLED11PAR30SN930	11	120V	95mA	60Hz	0.9	Internal
FLED11PAR30SN950	11	120V	95mA	60Hz	0.9	Internal

PHYSICAL SPECIFICATIONS:

PART NUMBER	LAMP STYLE	BASE	BULB FINISH
FLED11PAR30SN930	PAR30SN	E26	LED
FLED11PAR30SN950	PAR30SN	E26	LED

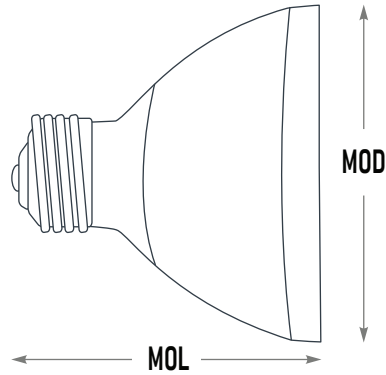

MAX LENGTH (MOL)	MAX OVERALL DIA (MOD)	WEIGHT oz/lbs	OPERATING TEMP.	STORAGE TEMP.	LED TYPE	BEAM ANGLE	NUMBER OF LEDS
85 mm - 3.3"	95 mm - 3.74"	6.01 oz - 0.376 lbs	-20° - 45° F	-40° - 85° F	SMD	40°	12
85 mm - 3.3"	95 mm - 3.74"	6.01 oz - 0.376 lbs	-20° - 45° F	-40° - 85° F	SMD	40°	12