

CATALOG #:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

PART NUMBER:

FTL42T8/CS/DEBYPASS

42W T8 8FT LED G13 5CCT DOUBLE END


Fusion T8 LED linear tubes provide the efficiency of fluorescent technology in recessed, surface mounted and specialty fixtures. The 50,000hr lifetime of these lamps far outlast most fluorescent equivalents and provide savings on replacement labor and maintenance costs.

FEATURES & BENEFITS:

- Type B
- Double ended application
- 5CCT 3K,35K,4K,5K, and 65K
- Includes interchangeable end caps kits for FA8 or R17D applications
- Shatterproof design

APPLICATIONS:

- Office, Schools and Commercial Buildings
- Mall and retail Stores
- Hotels and Recreational Facilities

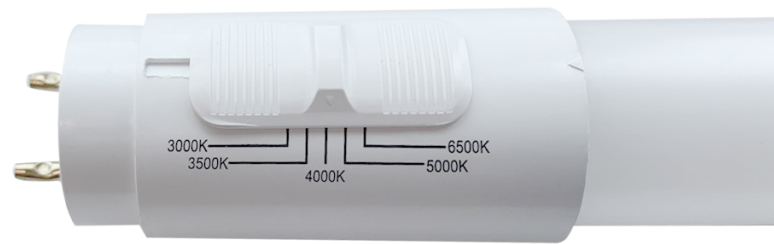



END CAP KITS
Includes interchangeable end caps kits for FA8 or R17D applications



ORDERING INFORMATION:

PART NUMBER	IMS CODE	DESCRIPTION	UNIT QTY	CASE QTY	CASE DIMENSIONS	CASE WEIGHT
FTL42T8/CS/DEBYPASS	0609-2580	42W T8 8FT LED G13 5CCT DOUBLE END	1	20	51"×5.7"×7.5"	15.5LBS

OPERATING SPECIFICATIONS:

PART NUMBER	LAMP WATTS	INITIAL LUMENS	EFFICACY	CCT	CRI	CERTIFICATIONS	RATED LIFE (HOURS)	WARRANTY
FTL42T8/CS/DEBYPASS	42W	4620lm 4620lm 5000lm 5000lm 4800lm	110lm/W 110lm/W 119lm/W 119lm/W 115lm/W	3000K 3500K 4000K 5000K 6500K	>83	cULus	50,000 hrs	5-Years

CATALOG #:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

ELECTRICAL SPECIFICATIONS:

PART NUMBER	LAMP WATTS	LAMP OPERATING VOLTAGE	LAMP OPERATING CURRENT (MA)	OPERATING FREQUENCY	DRIVER	POWER FACTOR	SURGE PROTECTION RATING
FTL42T8/CS/DEBYPASS	42W	120-277V	400	50/60Hz	INTERNAL	> 0.9	500V

PART NUMBER	LAMP STYLE	BASE	MAX OVER-ALL LENGTH (MOL)	MAX OVER-ALL DIA. (MOD)	WEIGHT	OPERATING TEMP.	STORAGE TEMP.	BEAM ANGLE	NUMBER OF LEDS	ENCLOSED RATED
FTL42T8/CS/DEBYPASS	T8	G13	96"	1"	1.2LBS	-4~113°F [-20~45°C]	-4~140°F [-20~60°C]	220°	356	YES

LINE DRAWING:

